





# 372 MULTI - FLAVOR

## PRODUCT SPECIFICATIONS



### Capacity

Electric Frequency	60 Hz			50 Hz		
	Dispenser Type	Air-Cooled	Remote	Water-Cooled	Air-Cooled	Remote
Barrel Volume <sup>  </sup>	128 oz	N/A	N/A	3,785 mL	N/A	N/A
Continuous Draw - Single Barrel <sup>§</sup>	1,680 oz/hr	N/A	N/A	49,684 mL/hr	N/A	N/A
Continuous Draw - Alternating Barrels <sup>§</sup>	1,800 oz/hr	N/A	N/A	53,232 mL/hr	N/A	N/A
Recovery Time <sup>§</sup>	7 mins	N/A	N/A	7 mins	N/A	N/A
Refrigeration	6,400 BTU/hr (6,752 kJ/hr), R-404A/R-448A <sup>†</sup>					
Agency	NSF 18  Intertek UL/CSA 60335-1  Intertek			Complies with IEC/EN 60335-1; IEC/EN 60335-2-75; IEC/EN 60335-2-89; IEC/EN 61000-3-2; IEC/EN 61000-3-3; CISPR 14-1; CISPR 14-2.		
	Complies with UL 60335-1; UL 60335-2-89; IEC 60335-2-75.					

<sup>§</sup> Testing completed at 75°F (24°C).

<sup>||</sup> Volume varies based on barrel faceplate.

<sup>†</sup> R-404A and R-448A refrigeration systems are functionally equivalent.

### Electrical Requirements<sup>‡</sup>

Electric Frequency	60 Hz	50 Hz
Voltage	215 - 245 VAC <sup>Δ</sup> , Single Phase	215 - 245 VAC <sup>Δ</sup> , Single Phase
Current/Power	20 Amps	3000 W
Receptacle	NEMA #L6-20R, 3 Wire	Varies depending on market.
Beater Motor	(2) 1/6 HP, 0.85 A	(2) 1/6 HP, 0.81A
Fan Motor	(1) 1/6 HP, 0.43 A	(1) 1/10 HP, 0.36 A

<sup>‡</sup> General requirements only. Always check dispenser nameplate label for specific rating information. <sup>Δ</sup> Buck-boost transformer or AVR required for operation outside this range.


ROHS Compliant. FBD strives for continuous improvements and engineering innovations. Equipment design and/or specifications may change without notice.

©2021, FBD Partnership, L.P. FBD®, the FBD logo, and "Everyone Loves Frozen®" are trademarks of FBD Partnership, L.P., all rights reserved.



Frozen Beverage Dispensers  
EVERYONE LOVES FROZEN®

372 MULTI-FLAVOR

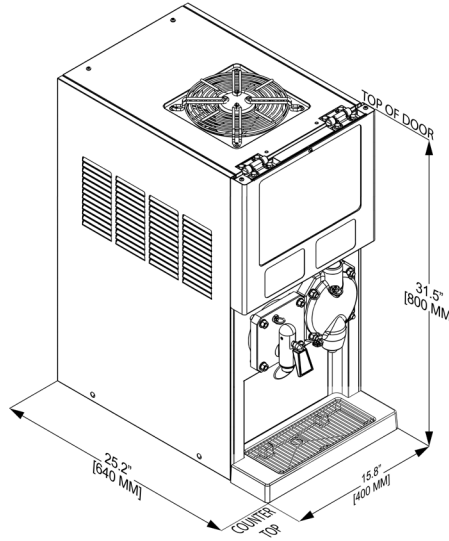

### Weights & Dimensions

Measuring System	Imperial			Metric		
Door Model	Short Door	Tall Door		Short Door	Tall Door	
Height	31.5 in	N/A		800 mm	N/A	
Width	15.8 in			400 mm		
Depth	25.2 in			640 mm		
Back/Side Clearance (Min.)	2 in			51 mm		
Top Clearance (Min.)	12 in			305 mm		
Duratrans	9 11/16 in x 13 9/16 in	N/A		246 mm x 345 mm	N/A	
Flavor Card	4 7/8 in x 3 1/2 in			124 mm x 89 mm		
Screen Size	5 in Touch Screen			127 mm Touch Screen		
Dispenser Type	Air-Cooled	Remote	Water-Cooled	Air-Cooled	Remote	Water-Cooled
Empty Weight	199 lbs	N/A	N/A	90 kg	N/A	N/A
Operating Weight	217 lbs	N/A	N/A	98 kg	N/A	N/A

### Water, CO<sub>2</sub> and Syrup Requirements

Measuring System	Imperial	Metric
Water System Input	3/8" Supply Line, 30 PSIG Flowing (minimum)	3/8" Supply Line, 207 kPag Flowing (minimum)
CO <sub>2</sub> System Input	70 - 72 PSIG (maximum)	483 - 496 kPag (maximum)
Condenser Water Inlet Flow Rate <sup>o</sup>	N/A	N/A
Condenser Water Inlet Temperature <sup>o</sup>	N/A	N/A
Syrup	Input: 70 - 72 PSIG (482 - 496 kPag)	
	Bag-In-Box (BIB) Connections, (2) Base Syrups and (4) Flavor Injection Syrups	

<sup>o</sup> For water-cooled dispensers.