

## 152 (50HZ) SPECIFICATIONS

### SHORT SIDE-OPEN DOOR UNIT

#### DIMENSIONS

Countertop Unit:  
Width: 14.4 in. (366 mm)  
Depth: 26.2 in. (665 mm)  
Height: 31.5 in. (800 mm)

#### CAPACITY

Barrel Size: 128 oz (3,785 mL)  
Continuous Draw (alternating barrels): 1,320 oz/hour (39,037 mL/hr)  
Recovery Time (75°F ambient): 8 Minutes

#### ELECTRICAL REQUIREMENTS

208-248 VAC (Buck and boost transformer required for operation outside this range)  
Single Phase, 50 Hz, 3 Wire, 10 Amp

#### REFRIGERATION

6,250 BTU/Hr, R-404A

#### SPACE REQUIREMENTS

Sides and Back: 2 in. (51 mm) Minimum  
Top: 12 in. (305 mm) Minimum (from unit top panel)

#### WEIGHT

Empty Unit: 166 lb (75 kg)  
Operating Unit: 184 lbs (84 kg)

#### SYRUP CONNECTION

Bag-In-Box (BIB)

#### MOTORS

Beater: (2) 1/6 HP (120 W)  
Fan: 1/10 HP (80 W)

#### WATER REQUIREMENTS


Fresh Water, Minimum 3/8" Supply, Minimum 30 psig (207 kPa)  
Flowing, Maximum 70 psig (483 kPag) Static

#### CO<sub>2</sub> SYSTEM

Supply Pressure: 70-72 psig (483-496 kPag)

#### OPTIONAL ACCESSORIES

Base Cart with Casters  
Leg Kit (set of four)  
Painted Sheet Metal  
BIB Rack  
Install Kit

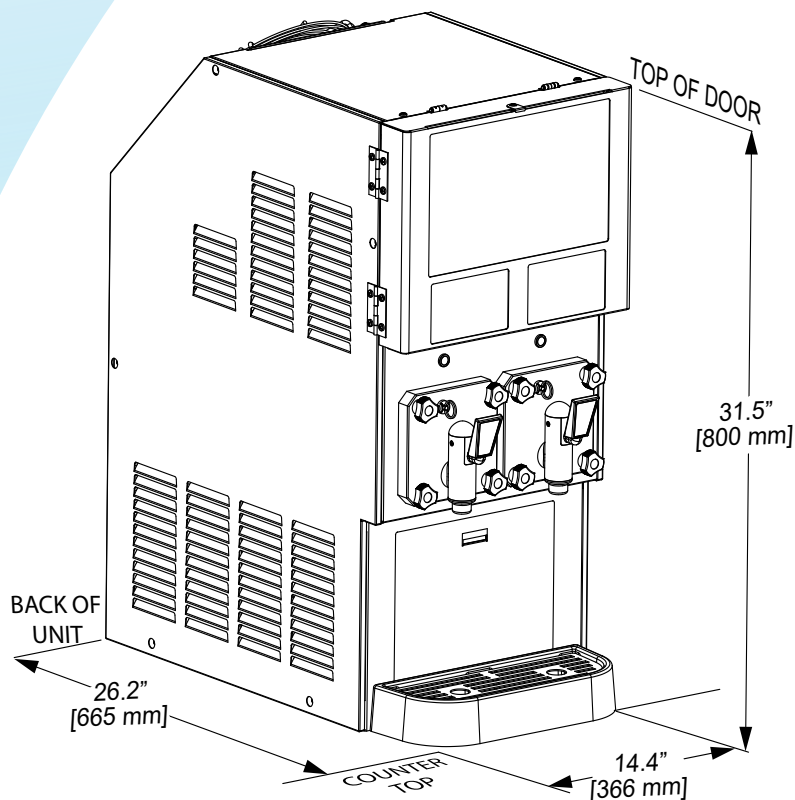

152



Frozen Beverage Dispensers  
EVERYONE LOVES FROZEN™



## PRODUCT FEATURES

- Inline Carbonation™ — creates a more consistent over-run, quality, and yield.
- Electronic simplicity offers easy-to-use keypad interface.
- Optimal use of counter space with minimum ventilation of two inches on the sides and back.
- Customizable individual barrels allow for hundreds of different drink profile combinations, including sugar-free options.
- Smallest and most cost-effective carbonated beverage dispenser on the market.
- Ideal for low-volume locations with limited space.